

Day-Night Mode (V2 ONLY)

Concept

Night Mode is a setting that allows users to enable/disable an Answering Rule by using a star-code or speed dial key. The star-code *74 is used to Activate Night mode. The star-code *75 is used to de-activate night mode.


Items Needed

If you are using a Routing User to direct calls to a specific destination, then the 'Night' Answering Rule described here must be configured for the Routing User. The Routing User must also be added as a line key to any phone you wish to be able to enable/disable Night Mode. This is accomplished by adding the extension of the Routing User to the lines of the phone in NDP.

Warning

When using Night mode, there's a limitation of using only two time-frames on the user. (Night Mode and Default rules)

- Step 1.
 - Create a Time Frame named 'Night'

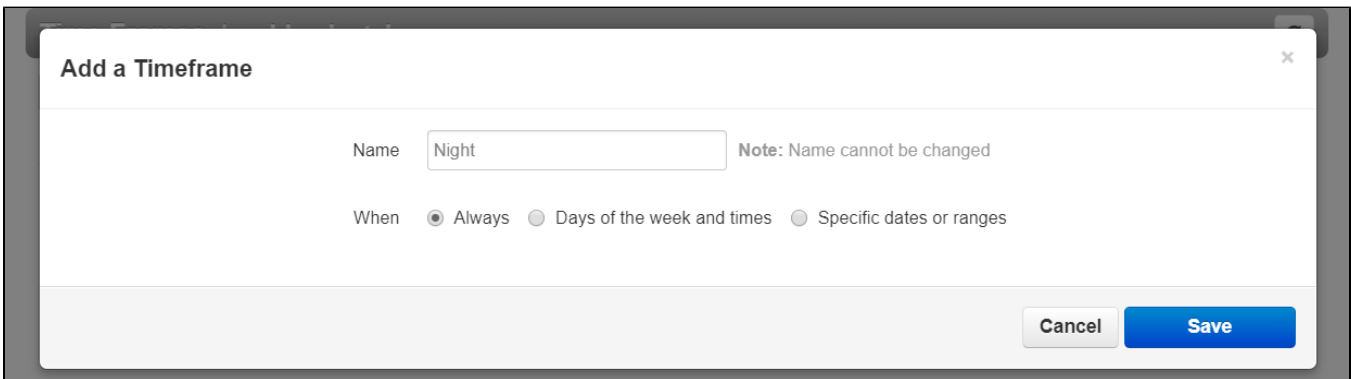

Add a Timeframe

Name **Note:** Name cannot be changed

When Always Days of the week and times Specific dates or ranges

The punctuation must match 'Night' exactly (the N must be capitalized)

- Step 2.
 - Create an Answering Rule called Night for the desired User using the Night timeframe

Add an Answering Rule ✕

Time Frame Night ▼ This is when your answering rule will apply

Enabled

Do not disturb

Call screening

Call Forwarding

Always Voicemail - 401 (Marty Mcfly)

On Active Extension, number or phone

When busy Extension, number or phone

When unanswered Extension, number or phone

When offline Extension, number or phone

Simultaneous ring

Include user's extension

Ring all user's phones

Answer confirmation for offnet numbers

Extension, number or phone 0 +

Cancel Save

- The Night Answering Rule must be the top-most priority in the list of Answering Rules. When this rule is enabled by the *74 star-code, it will show as "Active".

Time Frame	Description
↕ Night Active	Forward always to Voicemail - 401 (Marty Mcfly)
↕ Default	Simultaneously ring x420

When this rule is disabled by the *75 star code, it will be ignored and the switch will move on to the next applicable answering rule.

Time Frame	Description
↕ Night Disabled	Forward always to Voicemail - 401 (Marty Mcfly)
↕ Default Active	Simultaneously ring x420

- Step 3.
 - If desired, create a speed-dial or programmable key using overrides to allow single-button access to this feature.